


# OF-215P-BB1

## 21.5" PCAP Open Frame



### Description

The OF-215P-BB1 is a 21.5", newly designed, commercial-grade open frame solution. The refined aesthetics, standard gasketed bezel, and cable management feature ensures that the customer specific application remains clean, aesthetically remarkable with the ability to endure harshest of environments. A stylish thin cable management bracket and versatile design, the OF-215P-BB1 is an exceptional choice for applications for all business sectors and well suited for point-of-sales, point-of-information, point-of-service and interactive signage. The OF-215P-BB1 retains all capabilities to mold a unique solution for any customer application.

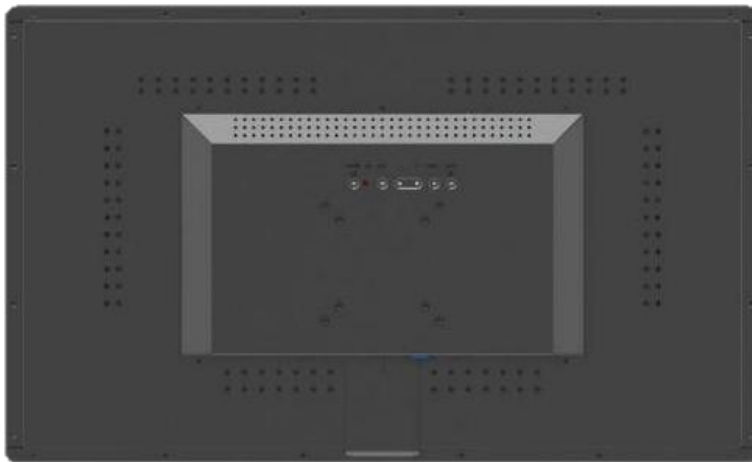

### Featured Specifications

- Size: 21.5" TFT LCD
- Maximum Resolution: 1920 x 1080
- Contrast Ratio: 3000:1
- Aspect Ratio: 16:9
- Brightness: 250 nits (No Touch), 225 nits (P-CAP)
- View Angle: H: 178°, V: 178°
- Video Port: 1 x VGA, 1 x HDMI
- Warranty: 1 year



# Specifications

## Touch LCD Display

|                        |                      |
|------------------------|----------------------|
| Touch Screen           | Projected Capacitive |
| Touch Points           | 10                   |
| Touch Screen Interface | USB-HID (Type B)     |

## I/O Ports

|             |                                                    |
|-------------|----------------------------------------------------|
| USB Port    | 1 x USB 2.0 (Type B) for Touch Interface (USB-HID) |
| Video Port  | 1 x VGA, 1 x HDMI                                  |
| Power Input | 1 x 12V DC Jack                                    |

## Physical Properties

|                           |                                       |
|---------------------------|---------------------------------------|
| Power Supply              | 60 W (12V, 5A) External Power Adaptor |
| Housing Color             | Black                                 |
| Construction              | Glass, Plastic (ABS), SECC Metal      |
| Dimensions (W x H x D) mm | 520.8 x 312.3x 52.9 mm                |
| Net Weight (kg)           | 5.6                                   |
| Gross Weight (kg)         | 7.05                                  |
| Carton (W x H x D) mm     | 615.0 x 405.0 x 160.0                 |
| VESA                      | 100 x 100 / 75 x 75 mm                |
| Ball Drop                 | IK08                                  |

## Safety

|                |          |
|----------------|----------|
| Certifications | CCC, BIS |
|----------------|----------|

## Environment

|                       |                                            |
|-----------------------|--------------------------------------------|
| Operating Temperature | 0°C ~40°C, 20% ~ 80% RH. Non-Condensing    |
| Storage Temperature   | -20°C ~ 60°C, 10% ~ 95% RH. Non-Condensing |

[www.airdigilife.com](http://www.airdigilife.com) | [info@airdigilife.com](mailto:info@airdigilife.com)

**MicroTouch™**

Air Digilife Pvt Ltd  
B 507 Raheja Plaza Premises CSL LBS Marg, Nityanand Nagar, Ghatkopar West, Mumbai

The information presented in this specification sheet is intended as general information about MicroTouch products and is subject to change. Product specifications and warranties will be governed by MicroTouch Interactive, Inc. standard terms and conditions of sale. Products are subject to availability. Copyright © 2025 MicroTouch Interactive, Inc. All rights reserved. MT21-1004 - 032425