

# OF-320P-A1

## 32" PCAP Touch Monitor




### Description

The OF-320P-A1 is a 32" Full HD (1920 x 1080) PCAP, 30-point touch solution—encouraging effective and efficient user collaboration and engagement for many environments. The ultra slim build coupled with input/output versatility, a 20 mm slim bezel design and high contrast showcases its ability to exceed all your aesthetic and performance requirements. From collaborative settings to an embedded application for a point-of-service kiosk, wayfinding, or content sharing—the OF-320P-A1 delivers everything desired in a large format touchscreen.

### Featured Specifications

- Size: 31.5" TFT LCD
- Maximum Resolution: 1920 x 1080
- Contrast Ratio: 3000:1
- Aspect Ratio: 16:9
- Brightness: 500 nits (No Touch), 450 nits (P-CAP)
- View Angle: H: 178°, V: 178°
- Video Port: 1 x VGA, 1 x DP, 1 x HDMI 1.3
- Warranty: 3 year

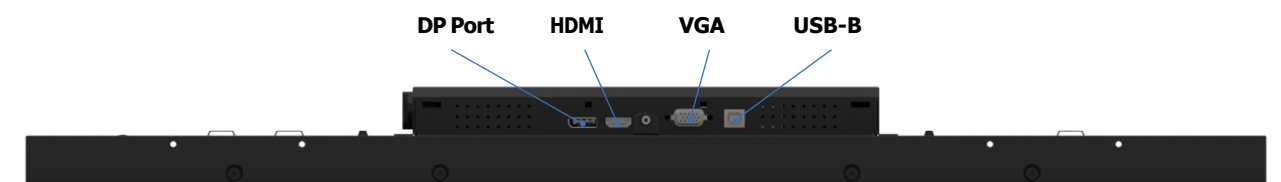

# Specifications

## Touch LCD Display

|                        |                      |
|------------------------|----------------------|
| Touch Screen           | Projected Capacitive |
| Touch Points           | 30                   |
| Touch Screen Interface | USB-HID (Type B)     |

## I/O Ports

|             |                                                    |
|-------------|----------------------------------------------------|
| Serial Port | –                                                  |
| USB Port    | 1 x USB 2.0 (Type B) for Touch Interface (USB-HID) |
| Video Port  | 1 x VGA, 1 x DP, 1 x HDMI 1.3                      |
| Audio Port  | –                                                  |
| Power Input | 1 x AC Power Input                                 |

## Physical Properties

|                           |                              |
|---------------------------|------------------------------|
| Power Supply              | AC Input 100–240VAC, 50–60Hz |
| Speaker                   | –                            |
| Housing Color             | Black                        |
| Construction              | Glass, SECC Metal            |
| Compliance                | Front Panel IP65 Compliant   |
| Dimensions (W x H x D) mm | 739.4 x 433.85 x 61          |
| Net Weight (kg)           | 10.4                         |
| Gross Weight (kg)         | 13.5                         |
| Carton (W x H x D) mm     | 890 x 155 x 630 mm           |
| VESA                      | 200 x 200 mm                 |
| Ball Drop                 | IK08                         |

## Safety

|                |                            |
|----------------|----------------------------|
| Certifications | CE, FCC, UL/CUL, CCC, RoHS |
|----------------|----------------------------|

## Environment

|                       |                                            |
|-----------------------|--------------------------------------------|
| Operating Temperature | 0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing   |
| Storage Temperature   | -20°C ~ 60°C, 20% ~ 90% RH. Non-Condensing |

## Optional Peripheral

|            |   |
|------------|---|
| Remote Key | – |
|------------|---|

[www.airdigilife.com](http://www.airdigilife.com) | [info@airdigilife.com](mailto:info@airdigilife.com)

**MicroTouch**

B 507 Raheja Plaza Premises CSL LBS Marg, Nityanand Nagar, Ghatkopar West, Mumbai

The information presented in this specification sheet is intended as general information about MicroTouch products and is subject to change. Product specifications and warranties will be governed by MicroTouch Interactive, Inc. standard terms and conditions of sale. Products are subject to availability. Copyright © 2025 MicroTouch Interactive, Inc. All rights reserved. MT21-1004 - 032425